



PART # 3X6V
Vertical Menu

SPECIFICATIONS

ILLUMINATION:

Daylight Spiral
Fluorescent 23 Watt
Bulbs

POWER:

120VAC / 2.5 Amp Max

CABINET:

All 6061 Alloy
Aluminum
construction with
St. St hardware. Sign frame
thickness is .125"

GRAPHICS:

Applied in reverse

WIRING:

Black or Red - Power
White - Neutral
Green - Ground



UL FILE NUMBER: UXYT.E180559



JOB NUMBER

DATE

NOTES:

FOUNDATION OPTIONS

1 If you have a continuous concrete slab or island that is reinforced and at least 6" thick (minimum 3ft x 8ft) this will be a sufficient foundation

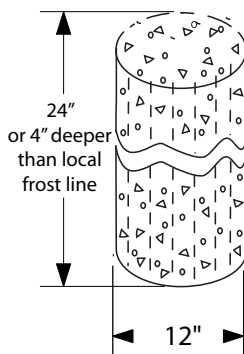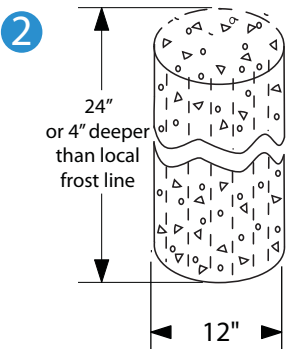

Use foundation grade concrete reinforced with at least 0.5" diameter steel rods

Anchoring holes are 9/16" in diameter and 1 1/2" o.c. from each edge

Use 1/2" x 8" long wedge anchors for fastening



11450 Stephens Rd
Warren, MI 48089
Phone::800-682-7446
www.tsscws.com