


TOP VIEW


- Specifications of components used in assembly:**
- Screws: Grade 8 Coated High strength Alloy Steel Hex Head Cap Screw 1/2"-13 Thread, 6-1/2" Length.
 - All screws have a minimum Rockwell hardness of C33 and minimum tensile strength of 150,000 psi. All meet ASME B18.2.1 and SAE J429.
 - Nuts: Grade F Nylon-Insert Hex Flange Locknut Zinc-Pltd Steel, 1/2"-13 Thread Sz, 3/4" W, 9/16" H.
 - Washers: Zinc-Plated Steel Type A SAE Flat Washer 1/2" Screw Size, 1-1/16" OD, .07"-.13" Thick.

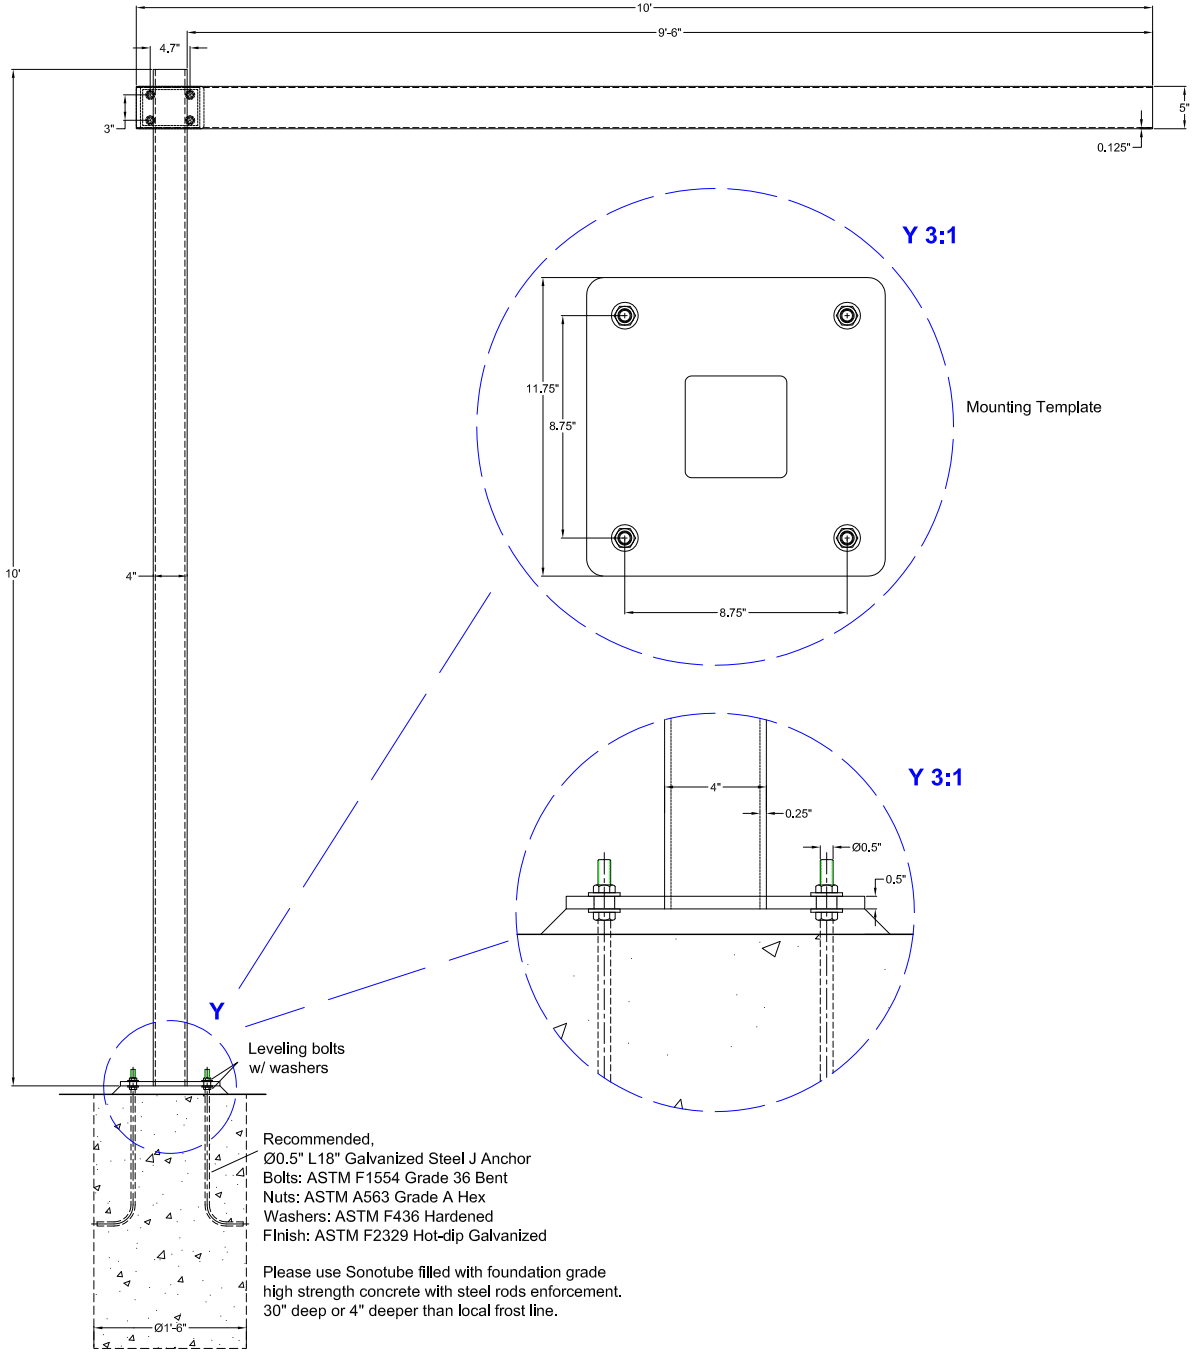

FRONT VIEW

A
B
C
D

	NAME	SIGNATURE	DATE	ACCESSORIES	QTY
DRAWN	GHA		05/08/13		
CHK'D	ISM		05/08/13		
APPV'D	ISM		05/08/13		
REV.	1				
				Unless otherwise specified all parts are made of Aluminum Alloy 6061-T6	



TSS INC.

11450 STEPHENS RD, WARREN, MI 48089 1-800-682-7446 www.tsscws.com

Title: ECONOLINE DRIVEWAY CLEARANCE STRUCTURE (Driver side is shown in drawing)	Part Number: CDM1 CPM1 CDBE1 CPBE1
SCALE: 1:22	SHEET 1 OF 1