



# 5 FT WET LOCATION LED LIGHT OPTIONS

## CONDUIT OPTION (RIGID OR FLEXIBLE)

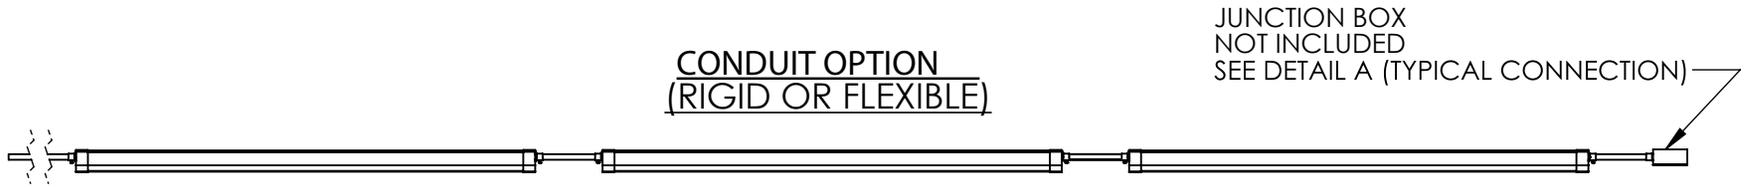

ACCEPTS 1/2" NPT CONDUIT  
THREAD, USE METALIC OR WATER  
TIGHT CONNECTIONS.

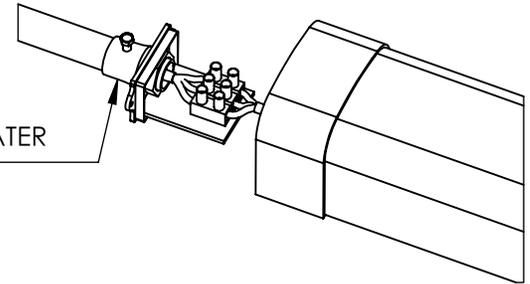


DETAIL A

## JUMPER CABLES OPTION (CONNECTED WITH SJOW CORD AND LIQUID TIGHT CORD GRIP)



SHOWN WITH SJOW POWER CORD  
CONNECTED TO JUNCTION BOX  
SEE DETAIL B (TYPICAL CONNECTION)

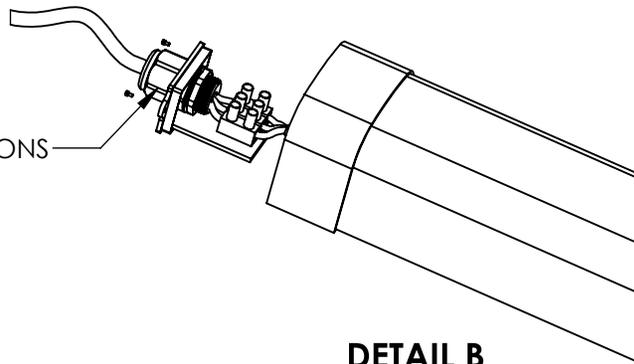

ACCEPTS CORD GRIP,  
USE METALIC OR  
WATER TIGHT CONNECTIONS

DETAIL B

VOLTAGE 100-277 VAC:  
WHEN 120 VAC IS USED YOU CAN CONNECT UP TO 6 UNITS  
WHEN 240 VAC IS USED YOU CAN CONNECT UP TO 10 UNITS

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	RCK	
CHECKED	ISM	
APPR.	ISM	
MFG APPR.		
Q.A.		

TITLE:

Led-Light-Assembly

SIZE	DWG. NO.	REV
A		
SCALE: 1:50	WEIGHT:	SHEET 1 OF 1

