


FRONT VIEW

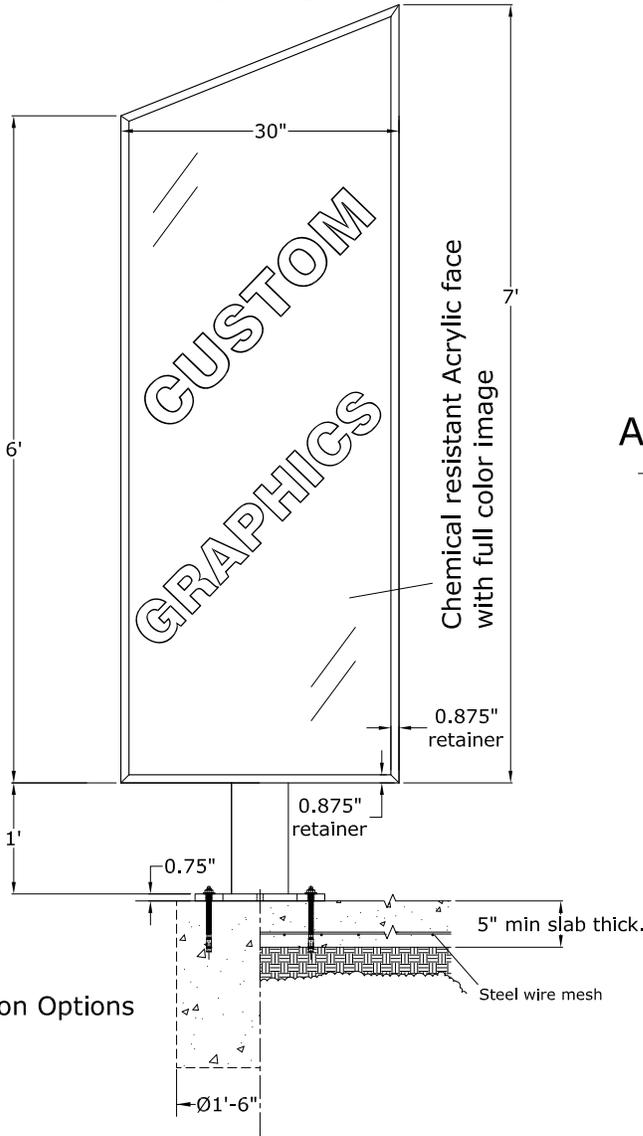

Foundation Options

Option 1: Sonotube Option 2: Slab


Option 1: If reinforced slab is not available:

- Please use 18" diameter Sonotube filled with foundation grade high strength concrete with steel rods enforcement 30" deep or 4" deeper than local frost line.
- Galvanized steel wedge anchors Dia 0.5"x7" long.

Option 2: Mounting on existing concrete slab:


- Minimum concrete slab thickness 5".
- Slab need to be enforced by steel wire mesh.
- Minimum slab dimension is 8'x3'.
- Galvanized steel wedge anchors Dia 0.5"x7" long.

BACK VIEW

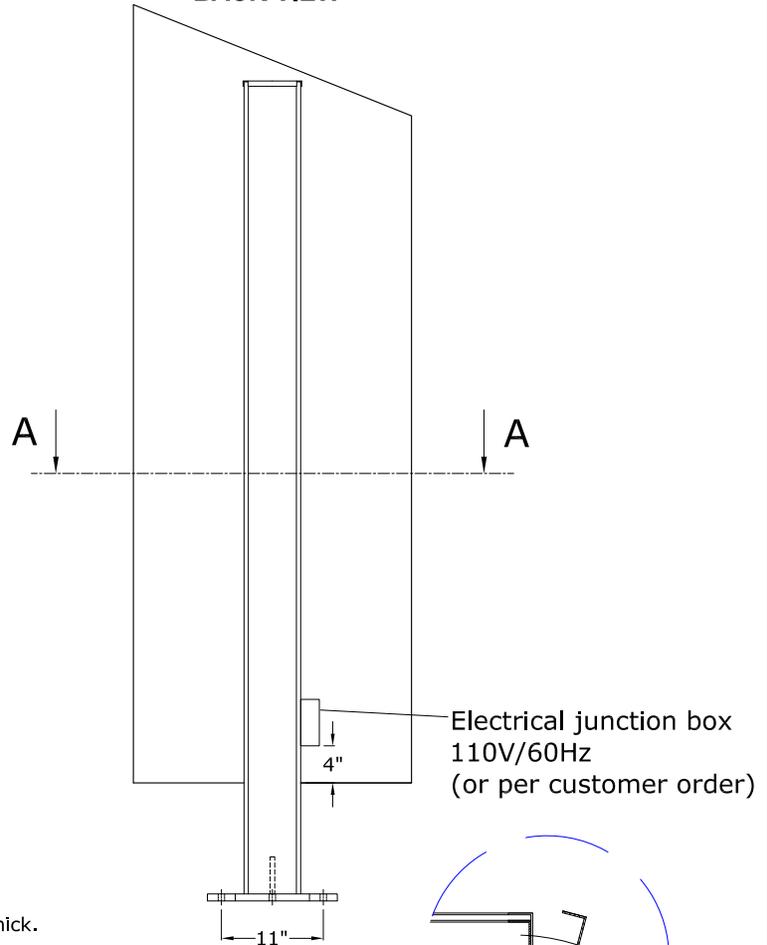

Ultra bright LED clusters


Removable retainers

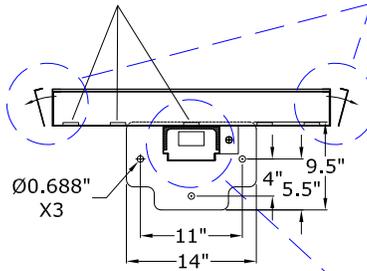

SECTION A-A

Power supply

Removable back cover to access power supply



Aluminum used: Structural components are made of Alloy 6061-T6 / Shell is made out of 3105-H14 baked enamel.

	NAME	SIGNATURE	DATE	ACCESSORIES	QTY.
DRAWN	GHA		07/03/13	HLG-150H-12	1
CHK'D	ISM		07/03/13		
APPV'D	ISM		07/03/13		
REV.	1				
REQUIRED POWER: - 100-240VAC, 2.4AMP					



TSS INC.

11450 STEPHENS RD, WARREN, MI 48089 1-800-682-7446 www.tsscws.com

TITLE:
EXCALIBUR MENU TOWER
WITH LED ILLUMINATION

SCALE: 1:20

Part Number: MTES

